


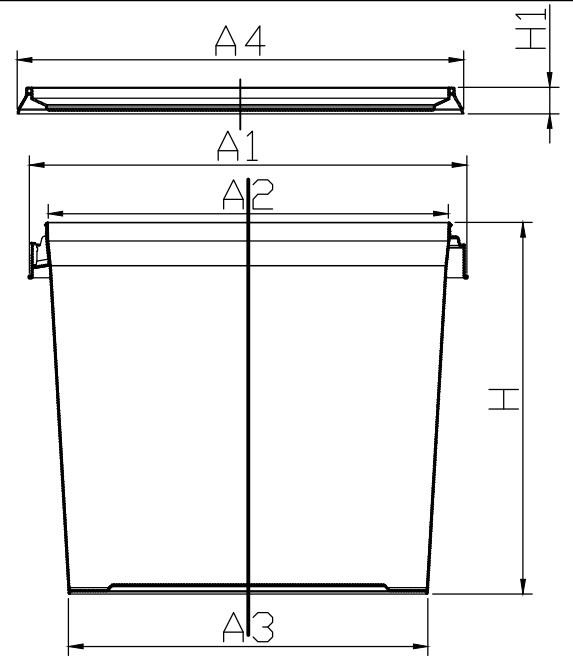

TECHNICAL SPECIFICATION
DESCRIPTION : 3,3 lt PP ROUND PAIL

Tolerances:
Weight / Volume : $\pm$ % 5
Thickness : $\pm$ 0,1mm
Dimensions : $\pm$ 1mm

	PAIL EY - 33G	LID EY - 33 GK
VOLUME TO RIM	3,434 lt.	-----
VOLUME UNDER LID	3,266 lt.	-----
MATERIAL	COPOLYMER PP (ANTISTATIC)	COPOLYMER PP (ANTISTATIC)
WEIGHT	Pail : 84 gr Handle : 2 gr	18,5 gr
DIMENSIONS	A1 : Ø190,14 mm A2 : Ø177,00 mm A3 : Ø160,00 mm H : 159,00 mm	A4 : Ø181,55 mm H1 : 8,40 mm
WALL THICKNESS	Wall Thickness : 0,75 mm Base Thickness : 0,80 mm	Thickness : 0,65mm
DECORATION	I.M.L. Single Side : — Double Side : — Wrap Around : ✓ OFFSET Offset : ✓ Centering : —	I.M.L. : ✓
COLORS	Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓
QUANTITY PER PALLET	 On Base : 33 pcs. Vertical : 116 pcs. Total : 3.828 pcs. x: 1100mm y: 1200mm z: 2350mm	 On Base : 33 pcs. Vertical : 710 pcs. Total : 23.430 pcs. x: 1100mm y: 1200mm z: 2350mm
STATIC STACKING LOAD	MAX: 25 KG. Max. Top Load on bottom container at 23°C .	